DAMR
Illuminated center dot ensures rapid target acquisition at any distance and in any light. Positioned in the second focal plane – providing consistent reticle size at 8×.

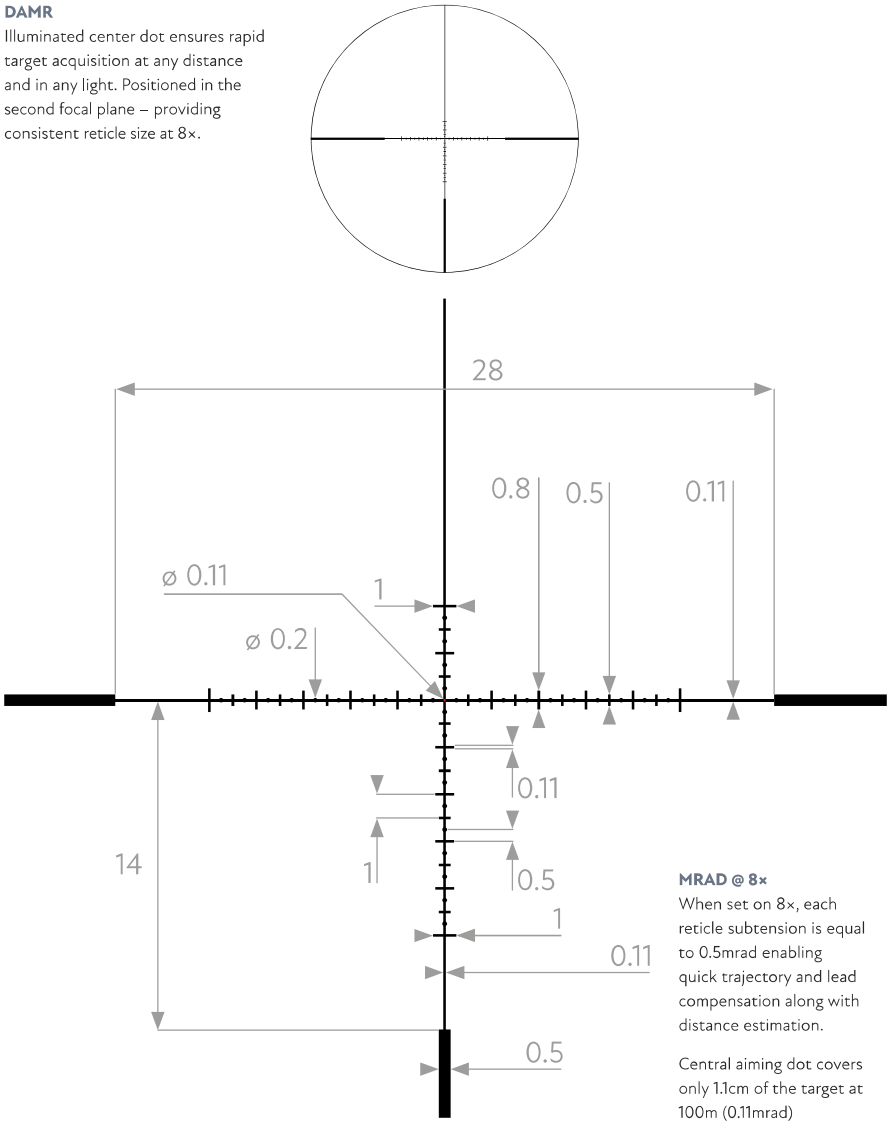

MRAD @ 8×
When set on 8×, each reticle subtension is equal to 0.5mrad enabling quick trajectory and lead compensation along with distance estimation.

Central aiming dot covers only 1.1cm of the target at 100m (0.11mrad)

STRYKER HD

1-8×24 SFP

Wide FOV | Ultra-bright, daylight-visible illuminated dot
Delta unique low profile ballistic turret | Indication of the exact elevation

Elevation turret: exposed low profile, locking with zero stop and turn indicator. Three ballistic rings.

Windgage turret: capped low profile.

Counter Clockwise (CCW).

Extra battery compartment.

INCLUDED:
Screw-in Throw Lever.

Magnification Range	1× - 8×
Objective Diameter	24mm
Field of View @ 100m	38.9m - 4.9m
Eye Relief	82 – 100mm
Diopter Range	-3D/+3D
Water Proof (N2)	0.3kg/cm²
Reticle Position	2nd focal plane
Illumination	Dot
Per Click	0.1mrad
Elev Adj Range	30mrad
Wind Adj Range	30mrad
Tube Diameter	30mm
Length	264mm
Weight	570g
Batteria	CR2032
Warranty	10 years

with reticle DAMR
SKU DO-2522